

FEATURESS


1、5mmL.Low leakage current, accurate and reliability, suit for use in high stable circuits.

SPECIFICATIONS

Item	Performance Characteristics																							
Operating Temperature Range	-40 to +105℃																							
Rated Working voltage Range	4 to 50V																							
Nominal Capacitance Range	0.1 to 100(uF)																							
Capacitance Tolerance	± 20%（120Hz, +20℃）																							
Leakage Current	I≤0.002CV or0.4(uA)				Whichever is greater measured after 2minutes application of rated working voltage at +20℃																			
Dissipation Factor tan δ (120Hz+20℃)	<table><tr><td>Working voltage(V)</td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>tan δ (max.)</td><td>0.35</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td></tr></table>								Working voltage(V)	4	6.3	10	16	25	35	50	tan δ (max.)	0.35	0.24	0.20	0.16	0.14	0.12	0.10
Working voltage(V)	4	6.3	10	16	25	35	50																	
tan δ (max.)	0.35	0.24	0.20	0.16	0.14	0.12	0.10																	
Low Temperature Characteristics	Impedance ratio max. at 120Hz																							
	Working voltage(V)	4	6.3	10	16	25	35	50																
	Z-25℃/Z+20℃	7	4	3	2	2	2	2																
	Z-40℃/Z+20℃	15	10	8	6	4	3	3																
Multiplier for Ripple Current vs. Frequency	CAP(uF)\Hz		50(60)	120	400	10K	50K-100K																	
	Multiplier		0.70	1.0	1.17	1.30	1.50																	
Multiplier for Ripple Current vs. Temperature	Temperature℃		45	60	70	85	105																	
	Multiplier		2. 10	1. 90	1. 65	1. 4	1. 00																	
High temperature Loading	Test conditions Duration :2000 hours Ambient temperature :+105℃ Applied voltage :Rated DC working voltage to polarity every 250 hours Post test requirements at +20℃ Leakage current : ≤ Initial specified value Capacitance change : ≤± 20% of initial measured value(4V:< ± 30%) tan δ : ≤200% of initial specified value																							
Shelf life	Test conditions Duration :1000 hours Ambient temperature :+105℃ Applied voltage : (None) Post test requirements at+20℃ Leakge current :≤Initial specified value Capacitance change :≤± 20% of initial measured value(4V:<± 30%) Tan δ :≤± 200% of initial specified value																							
Others	JIS C-5141 JIS C-5102																							

CASE SIZE TABLE

Unit:mm

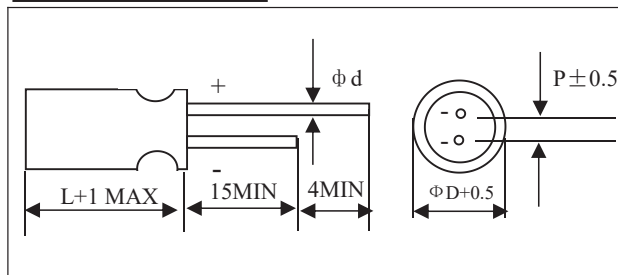

D ϕ	4	5	6.3
P	1.5	2.0	2.5
d ϕ (± 0.05)	0.45		

DIMENSIONS

$\phi D \times L$ (mm)

WV(SV)		4V(5)		6.3V(8)		10V(13)		16V(20)		25V(32)	
Cap.(uF)	Code	0G		0J		1A		1C		1E	
4.7	475									4×5	20
10	106							4×5	25	5×5	31
22	226			4×5	32	5×5	36	5×5	42	6.3×5	46
33	336	5×5	32	5×5	41	5×5	47	6.3×5	53	6.3×5	58
47	476	5×5	36	5×5	49	6.3×5	55	6.3×5	63		
100	107	6.3×5	62	6.3×5	76					Case size	Allowable ripple

Allowable Ripple (mA rms)at 105℃ 120Hz

$\phi D \times L$ (mm)

WV(SV)		35V(44)		50V(63)	
Cap.(uF)	Code	1V		1H	
0.1	104			4×5	1
0.22	224			4×5	2.1
0.33	334			4×5	2.7
0.47	474			4×5	4.1
1	105			4×5	8
2.2	225			4×5	16
3.3	335			4×5	21
4.7	475	4×5	22	4×5	26
10	106	5×5	34	6.3×5	35
22	226	6.3×5	51	Case size	Allowable ripple

Allowable Ripple (mA rms)at 105℃ 120Hz